

BT 2500 TO 5000




The buffer tank is used to store thermal energy in a heating system.

These tanks are made up of a black steel tank, suitable for the storage of heating water, but not suitable for the storage of domestic hot water.





Description

- Buffer tank for heating system, without heat exchanger.
- Polyester fiber insulation 100 mm thick, varnished exterior finish, untreated interior.
- External casing classified as standard M1 fire.
- 2 years warranty.

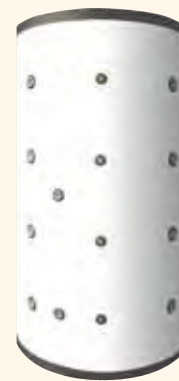

BT 2500, 3000, 4000 and 5000 liters

	Model	2500 L	3000 L	4000 L	5000 L
Reference		BT2500	BT3000	BT4000	BT5000
Total capacity (liters)		2346	2959	4043	5055
Weight empty (kg)		336	345	443	510
Polyester fiber insulation (mm)			100		
Maximum working-temperature (°C)			95		
Max tank operating pressure (bar)			3		
Flange (Ø mm)			290 / 200		

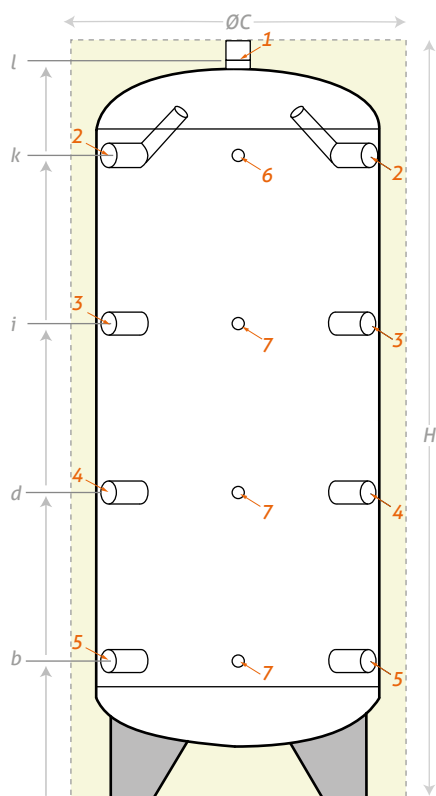

Outlet/Inlet tube	Model 2500 to 5000
1 Air evacuation	1"¼
2 Boiler inlet	1"½
3 Heating inlet	1"½
4 Boiler outlet - heating at 50°C	1"½
5 Boiler outlet - heating at 30°C	1"½
6 Thermometer	½"
7 Probes	½"

Buffer tank 2 years warranty

Certifications

Made in European Union



Model	ØC	ØD	H	b	d	i	k	l
2500	1450	1250	2220	395	855	1315	1775	2145
3000	1450	1250	2720	390	1020	1650	2280	2645
4000	1700	1500	2645	470	1030	1590	2150	2575
5000	1800	1600	2870	465	1100	1730	2355	2795

Dimensions (mm)

SYRIUS SOLAR INDUSTRY
15 rue du Perpignan - ZAC Descartes
34880 Lavérune - France

+33 (0) 4 67 82 00 18
contact@syrius-solar.fr

SAS with capital of € 156 800 - RCS Montpellier 794 797 753 00041

www.syrius-solar.com

