

BVK-W 600 TO 2000

«Tank in tank» type - Single heat exchanger



The storage tanks proposed by Sirius are a «tank in tank» type. The domestic hot water tank is inside the storage tank for the space heating water. They can be delivered, without heat exchanger or with one or two heat exchangers.

These tanks are used for Solar Energy Combined Systems (SECS), combining the production of domestic hot water and heating.



Description



- Storage tank «tank in tank» with one heat exchanger.
- Sanitary hot water tank* in enamelled steel.
- Tank enamelling inside treatment according to DIN 4753-3 and UNI 10025. Protection by magnesium anode.
- Polyester fiber insulation 100 mm thick, zipped PVC cover finish.
- Electric back-up on 1½ connection at mid-height.
- External casing classified as standard M1 fire.
- M0 on request.
- 5 years warranty, electric part 2 years warranty.

* Sanitary water meeting the French standard according to decree N° 89-3 of 03/01/89



BVK-W 600 to 2000 liters

	Model	600 L	750 L	1000 L	1500 L	2000 L
Reference		BVK0600W	BVK0750W	BVK1000W	BVK1500W	BVK2000W
Total capacity (liters)		640	750	830	1393	2015
Effective capacity tank DHW / heating water (liters)		170 / 470	205 / 545	220 / 610	330 / 1063	420 / 1595
Weight empty (kg)		290	325	360	430	545
Polyester fiber insulation (mm)		100				
Heat exchanger surface (m ²)		2.5	2.7	3.0	3.3	3.8
Heat exchanger volume (liters)		14.4	15.3	16.7	19.0	21.6
Heat exchanger power (kW)		63	68	75	86	99
Rate of flow heat-exchanger (m ³ /h)		2.7	2.9	3.2	3.7	4.3
Pressure loss (mbar)		193	238	315	468	700
Energy efficiency class		C				
Maximum working-temperature (°C)		95				
Max heating / tank operating pressure (bar)		3 / 6				
Max working heat exchanger pressure (bar)		10				

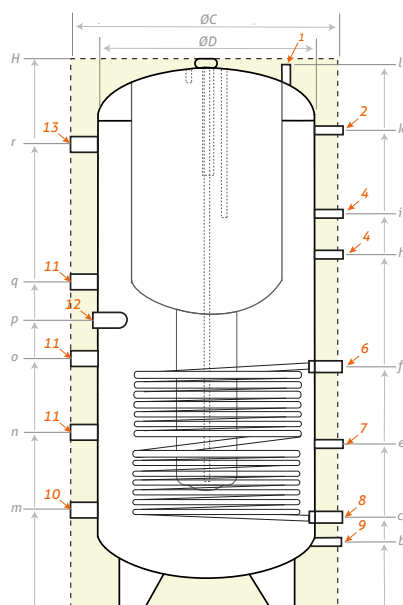

	Outlet/Inlet tube	Model
1	Air evacuation	1/2"
2	Thermometer	1/2"
4	Temperature probes	1/2"
6.8	Heat exchanger outlet/inlet	1"
7	Solar probe	1/2"
9	Drain	3/4"
10.13	Heating outlet/inlet	1" 1/2
11	Available	1" 1/2
12	Electric element	1" 1/2
14	Cold Water inlet	1"
15	Recirculation	1"
16	Anode	1" 1/4
17	Hot Water outlet	1"

Storage tank 5 years warranty

Certifications

Tank enamelling inside treatment according to DIN 4753-3 and UNI 10025
Made in European Union



Model	ØC	ØD	H	b	c	e	f	h	i	k	l	m	n	o	p	q	r	s	t
600	950	750	1775	240	330	595	880	1055	1235	1450	1710	340	590	890	950	1160	1450	220	290
750	950	750	2045	240	330	800	1040	1240	1380	1690	1980	340	590	890	1050	1160	1690	220	290
1000	990	790	2050	240	330	595	880	1290	1440	1745	1985	360	640	910	1050	1190	1695	240	290
1500	1200	1000	2150	290	400	750	950	1115	1390	1750	2085	390	710	990	1170	1360	1725	240	415
2000	1300	1100	2495	290	390	1060	1290	1425	1700	2060	2430	410	820	1230	1370	1640	2050	240	415

Dimensions (mm)

SYRIUS SOLAR INDUSTRY
15 rue du Perpignan - ZAC Descartes
34880 Lavérune - France

+33 (0) 4 67 82 00 18
contact@syrius-solar.fr

SAS with capital of € 156 800 - RCS Montpellier 794 797 753 00041

www.syrius-solar.com

