


# BT-AC 50

---



The buffer tank is used to store thermal energy in a heating system.

The BT-50 is generally used as a mixing bottle.

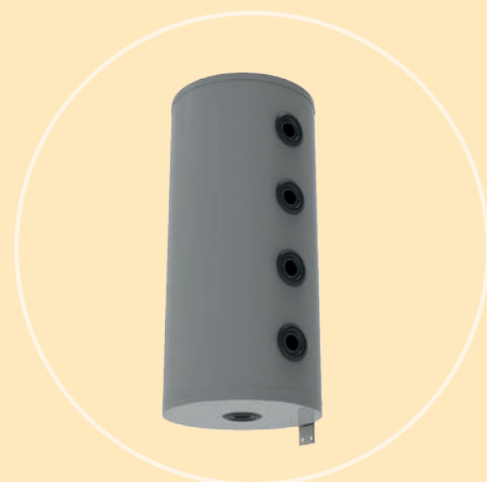



# Description

- Buffer tank for air conditioning and heating system.
- 50 liters without heat exchanger
- Rigid PU insulation injected 50 mm thick, grey lacquered metal finish.
- 8 outlets / inlets tubes.
- 2 years warranty.



## BT 50 liters

Model	50 L
<b>Reference</b>	<b>BT0050AC</b>
Total capacity (liters)	52
Weight empty (kg)	24.2
Standing losses $\Delta T$ 45K (W)	39
Energy efficiency class	B
Maximum working-temperature ( $^{\circ}C$ )	95
Max tank operating pressure (bar)	10

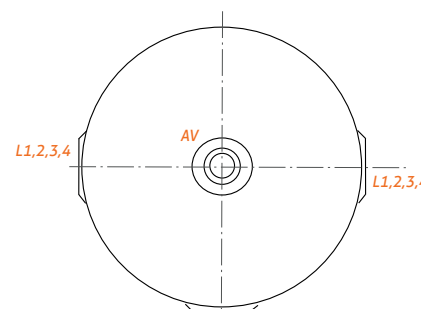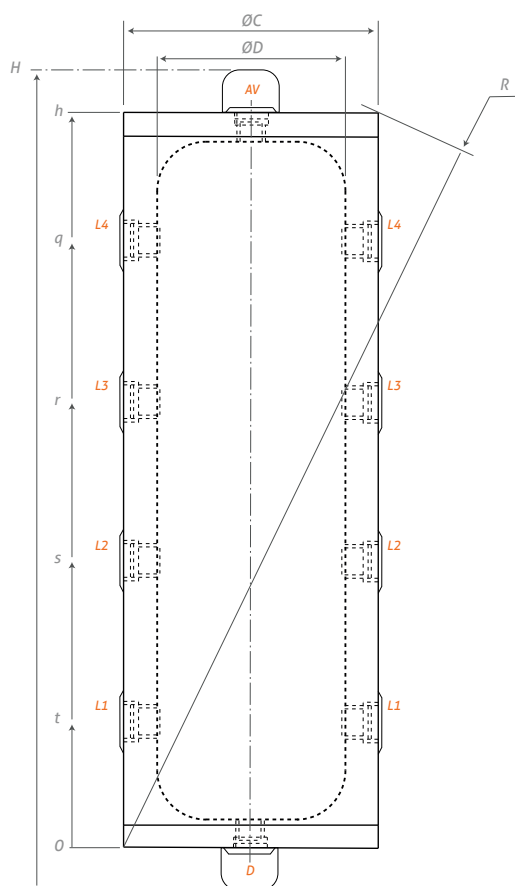

	Model
<b>Outlet/Inlet tube</b>	<b>50</b>
<b>AV</b>	Air ventilation 1"½
<b>D</b>	Drainage 1"½
<b>L1.2.3.4</b>	Inlet / Outlet (8) 1"¼

**Buffer tank 2 years warranty**

## Certifications

Made in European Union



Model	ØC	ØD	H	h	q	r	s	t	R
50	400	300	985	865	718	528	338	148	953

Dimensions (mm)

**SYRIUS SOLAR INDUSTRY**  
15 rue du Perpignan - ZAC Descartes  
34880 Lavérune - France

(+33) 4 67 82 00 18  
contact@syrius-solar.fr

SAS with capital of € 156 800 - RCS Montpellier 794 797 753 00041

[www.syrius-solar.com](http://www.syrius-solar.com)

