

BT-WW 1500 TO 2000

Double heat exchanger



The buffer tank is used to store thermal energy in a heating system.

These tanks are made up of a black steel tank, suitable for the storage of heating water, but not suitable for the storage of domestic hot water.





Description

- Buffer tank for heating system, equipped with two heat exchangers.
- Polyester fiber insulation 100 mm thick, varnished exterior finish.
- External casing classified as standard M1 fire.
- 2 years warranty.



BT-WW 1500 and 2000 liters

Model	1500 L	2000 L
Reference	BT1500WW	BT2000WW
Total capacity (liters)	1410	2010
Weight empty (kg)	298	407
Polyester fiber insulation (mm)		100
Heat exchanger surface S1/S2 (m ²)	3.5/3.0	4.0/3.1
Heat exchanger volume S1/S2 (L)	20.5/19.0	24.8/19.5
Heat exchanger power S1/S2 (kW)	91/66	96/74
Rate of flow heat-exchanger S1/S2 (m ³ /h)	3.9/2.8	4.1/3.2
Heating water production S1/S2 (m ³ /h)	1.6/1.6	2.8/1.7
Pressure loss S1/S2 (mbar)	565/276	765/279
Energy efficiency class		C
Maximum working-temperature (°C)		95
Max tank operating pressure (bar)		3
Max working heat exchanger pressure (bar)		10
Flange (Ø mm)		290 / 200

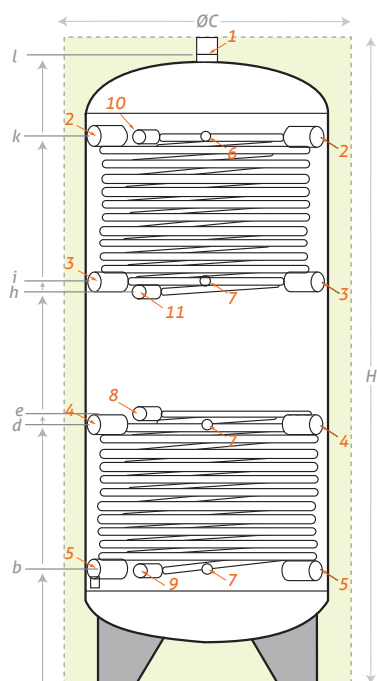

	Model
Outlet/Inlet tube	1500-2000
1	Air evacuation 1" 1/4
2-3	Inlet / Outlet 1" 1/2
4-5	
6	Thermometer 1/2"
7	Probes 1/2"
8	Heat exchanger inlet 1"
9	Heat exchanger outlet 1"
10	Heat exchanger inlet 1"
11	Heat exchanger outlet 1"

Buffer tank 2 years warranty

Certifications

Made in European Union



Model	ØC	ØD	H	b	d	f	h	i	k	l
1500	1200	1000	2165	390	850	1080	1220	1310	1770	2090
2000	1300	1100	2480	390	950	1230	1500	1510	2070	2405

Dimensions (mm)

SYRIUS SOLAR INDUSTRY
15 rue du Perpignan - ZAC Descartes
34880 Lavérune - France

+33 (0) 4 67 82 00 18
contact@syrius-solar.fr

SAS with capital of € 156 800 - RCS Montpellier 794 797 753 00041

www.syrius-solar.com

