



BVE-WM 200

The BVE-WM series tanks are specially designed for indirect solar systems, with exchanger. Cylinder and exchanger are made of enamelled steel. The tank is equipped on the side with connections for the flow and return to the solar collector, independently from the cold water inlet and hot water outlet. The BVE-WM is fixed vertically on a supporting wall.

Description

- Hot water storage tank*, with an exchanger
- Enamelled steel cylinder
- White prepainted sheet metal finish

* Sanitary water in compliance with French and European health regulations



Tank guarantee 5 years
Electrical guarantee 2 years

Certifications

Enamelling to DIN 4753-3 standards and
UNI 10025


Fabriqu  en Union Europ enne



BVE-WM 200 liters

Model / reference	200 L
Tank	BVE0200WM G/D*
Empty weight (kg)	65.5
Insulation: thickness (mm) / material	40 / polyurethane
Heat dissipation ΔT 45K (W)	61
Cooling constant (Wh/l/K)	0.1619
Max. working temperature (°C)	80
Fire-resistance class	-
Cylinder	
Capacity (liters)	196
Max. working pressure (bar)	-
Connections	2
Magnesium anode	Included
Electrical resistance	2.4kW - 230V included
Solar heat exchanger (lower)	
Volume contained (liters) / Exchange surface (m²)	5 / 0.76
Power (kW) / Flow (m³/h)	22.6 / 0.561
Pressure loss (kPa) / Max. working pressure (bar)	- / 6

*Tanks available with left or right connections

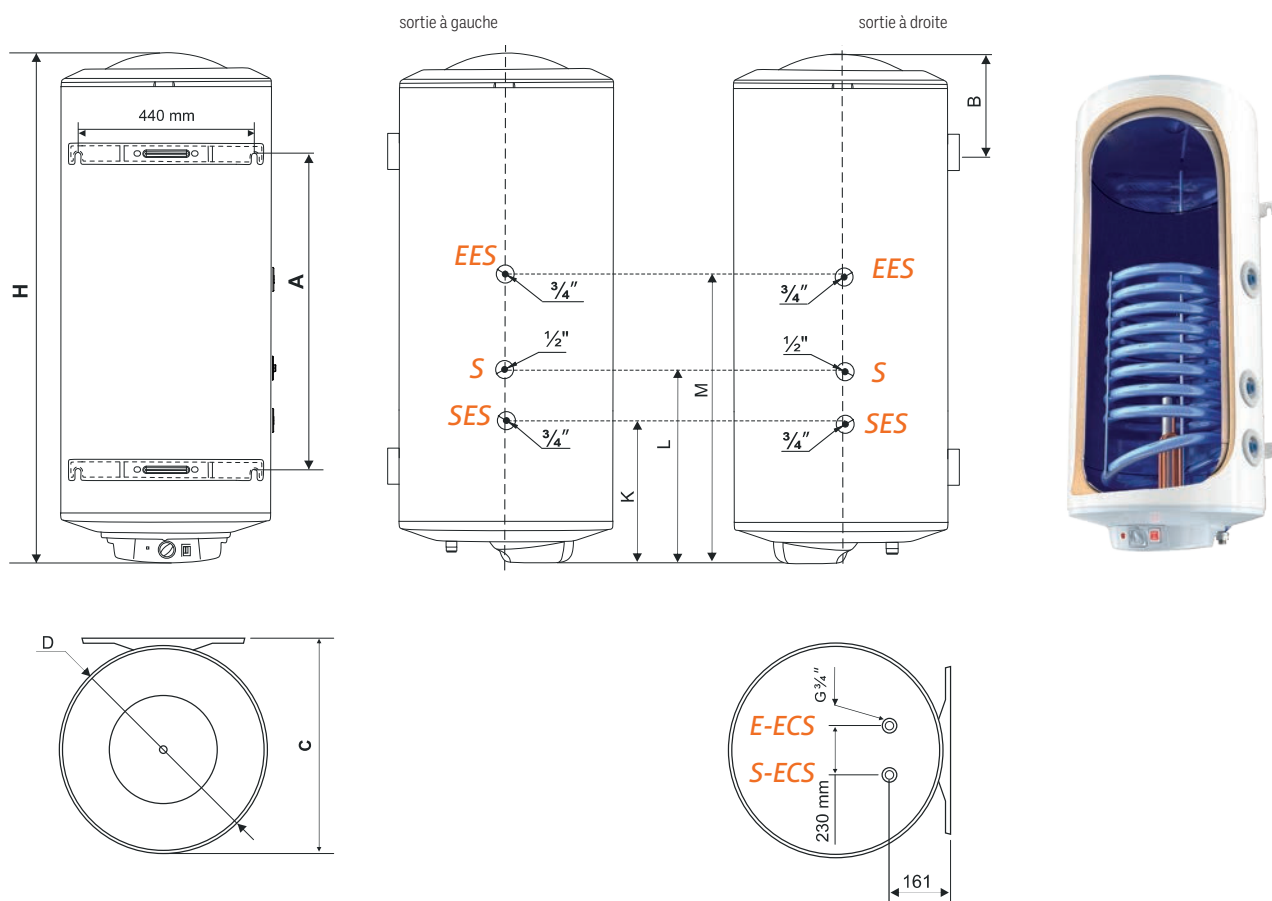

Model	ØD	H	A	B	C	K	L	M
200	560	1362	800	284	567	250	400	800

Dimensions (mm)

Connections	Model
E-ECS	Sanitary cold water inlet 3/4"
S-ECS	Sanitary hot water outlet 3/4"
EES	Solar heat exchanger inlet 3/4"
SES	Solar heat exchanger outlet 3/4"
S	Probe 1/2"

SYRIUS SOLAR INDUSTRY
15 rue du Perpignan - ZAC Descartes
34880 Lavérune - France

+33 (0) 4 67 82 00 18

contact@syrius-solar.fr

SAS with capital of 150 800 € - RCS Montpellier 794 797 753 00041

www.syrius-solar.fr

