

# BVE-W 1500 TO 2000

*Single heat exchanger*



The BVE-W series tanks are specially designed for primary circuit solar systems. They are equipped with a heat exchanger. The tank and the exchanger are made of enamelled steel. The heat exchanger connections are located on the side at the rear of the tank, separately from the cold water inlet and hot water outlet located on the front panel. These tanks are to be placed on the ground.



# Description


- Enamelled steel sanitary hot water storage tank\*, equipped with one heat exchanger.
- Tank enamelling inside treatment according to DIN 4753-3 and UNI 10025. Protection by magnesium anode.
- Polyester fiber insulation 100 mm thick, zipped PVC cover finish
- Optional electric backup on 1 1/2" connection at mid-height.
- External casing classified as standard M1 fire
- 5 years warranty, electrical part 2 years warranty.

\* Sanitary water in compliance with French sanitary regulations particularly DTU 60.1



## BVE-W 1500 to 2000 liters

Model	1500 L	2000 L
<b>Reference</b>	<b>BVE1500W</b>	<b>BVE2000W</b>
Total capacity (liters)	1390	1950
Weight empty (kg)	335	503
Polyester fiber insulation (mm)	100	
Heat exchanger surface (m <sup>2</sup> )	3.6	4.3
Heat exchanger volume (L)	21.0	26.0
Heat exchanger power (kW)	94.0	112.0
Rate of flow heat-exchanger (m <sup>3</sup> /h)	4.0	5.0
Pressure loss (mbar)	610	832
Energy efficiency class		C
Maximum working-temperature (°C)		95
Max tank operating pressure (bar)		8
Max working heat exchanger pressure (bar)		10
Outlets for temperature probes		3

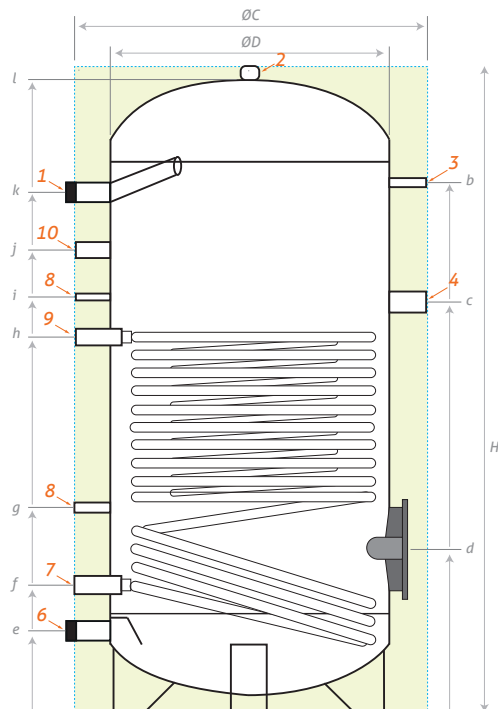

Outlet/Inlet tube	Model
<b>1</b> Hot Water outlet	1 1/2"
<b>2</b> Anode	1 1/2"
<b>3</b> Probes	1/2"
<b>4</b> Electric element	1 1/2"
<b>6</b> Cold Water inlet	1 1/2"
<b>7</b> Heat exchanger outlet	1 1/4"
<b>8</b> Thermostat	1/2"
<b>9</b> Heat exchanger inlet	1 1/4"
<b>10</b> Recirculation	1"

**Storage tank 5 years warranty**

## Certifications

Tank enamelling inside treatment according to DIN 4753-3 and UNI 10025  
Made in European Union



Model	ØC	ØD	H	b	c	d	e	f	g	h	i	j	k	l	m
1500	1200	1000	2185	1820	1350	515	280	415	575	1255	1375	1530	1870	2120	230
2000	1300	1100	2470	2000	1540	550	260	520	730	1430	1600	1750	1990	2405	230

Dimensions (mm)

**SYRIUS SOLAR INDUSTRY**  
15 rue du Perpignan - ZAC Descartes  
34880 Lavérune - France

+33 (0) 4 67 82 00 18  
contact@syrius-solar.fr

SAS with capital of € 156 800 - RCS Montpellier 794 797 753 00041

[www.syrius-solar.com](http://www.syrius-solar.com)

